

identifying content
M = Minimum content
N = Nice to have

Creating a repository workspace

PTC for Si repsita. Pzniecjteli poebnitisti.

Reports

Source


Reports

## Contains:

- baselines of selected components
- target flow to the Stream it was created from

Flow targets are setup:

- to Stream it was created from
- to flow targets of that stream (if any)

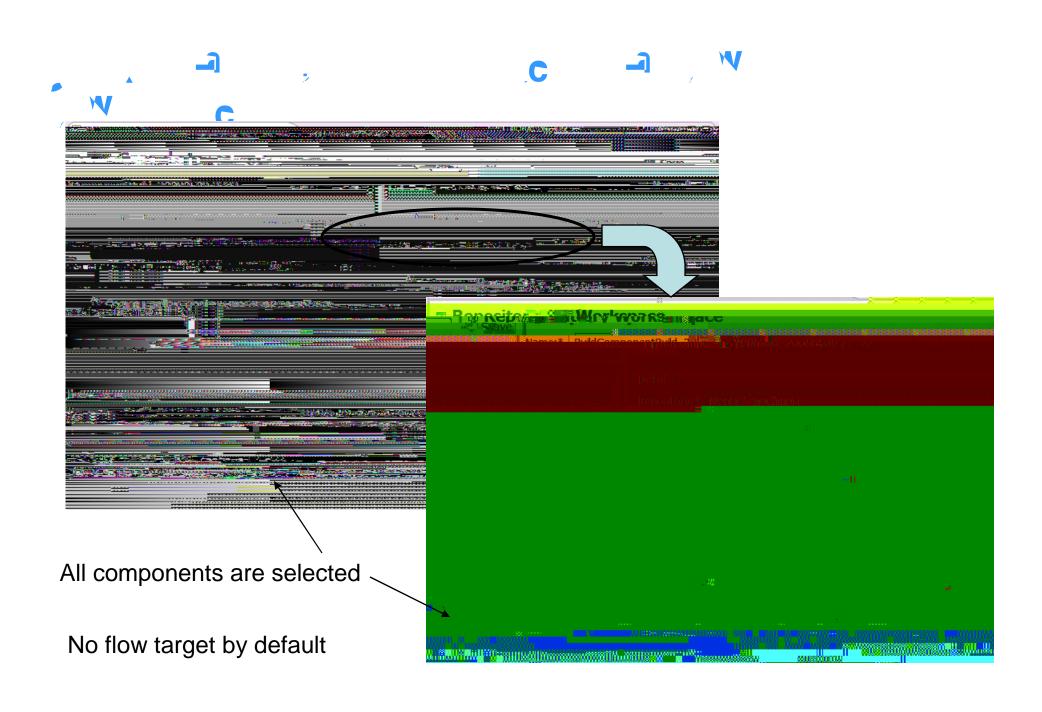

Repository workspace edition

SR



MINE DE









Leads to Stream Editor








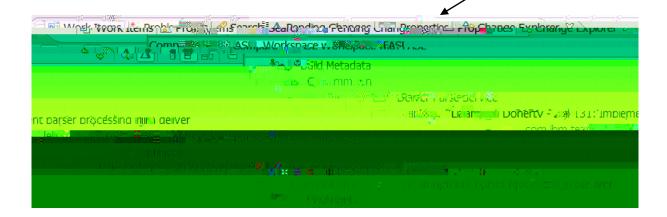


## 

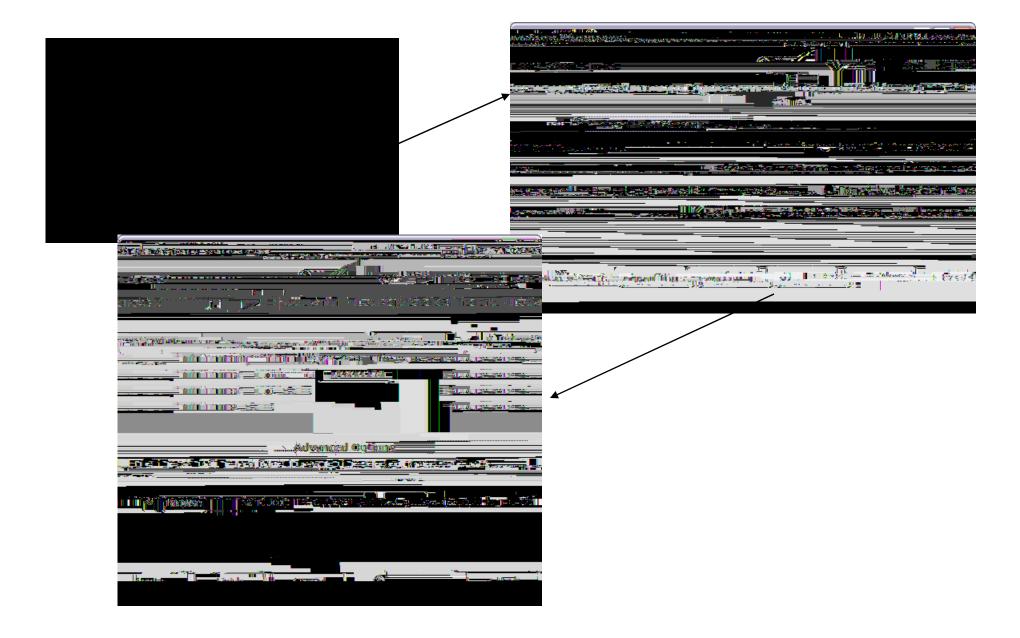



At workspace level:




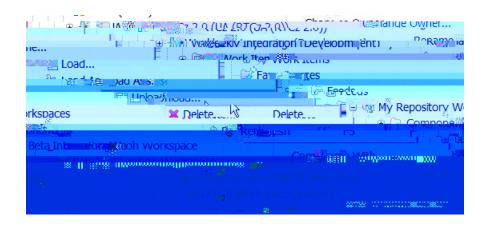

Team operations





## Locks










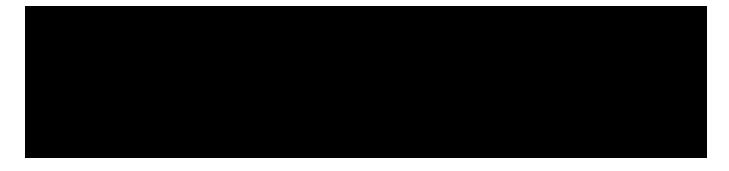


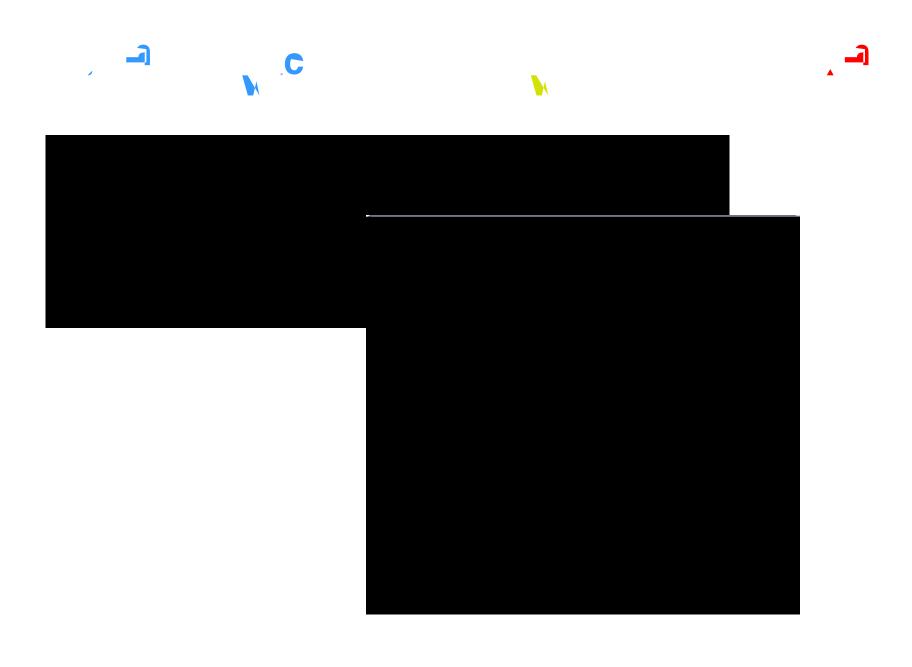


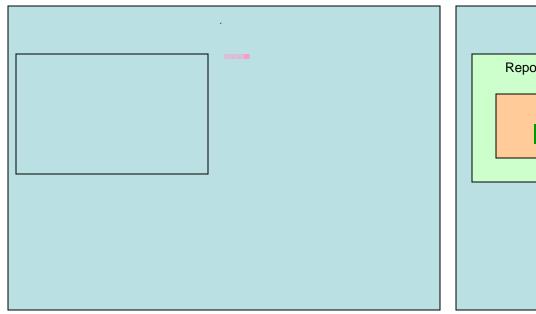


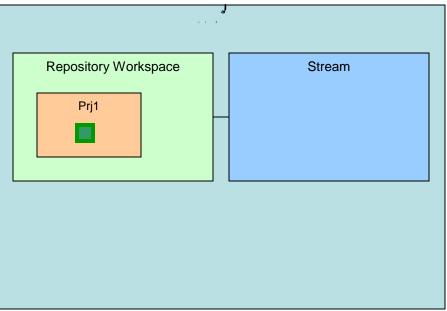


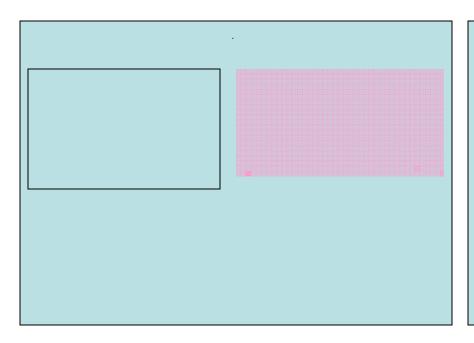


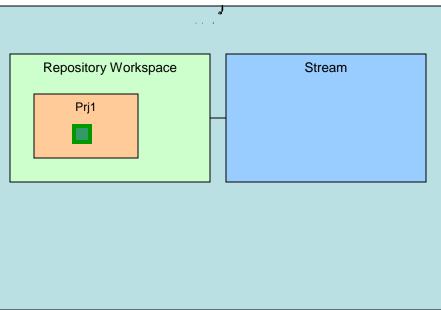

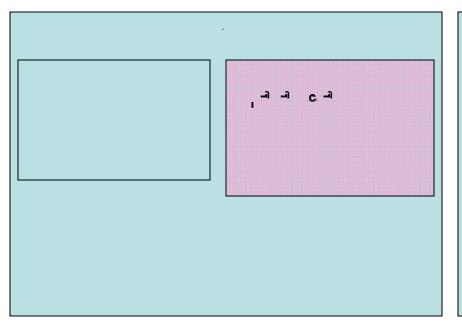

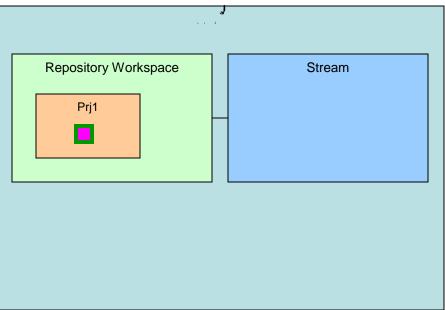

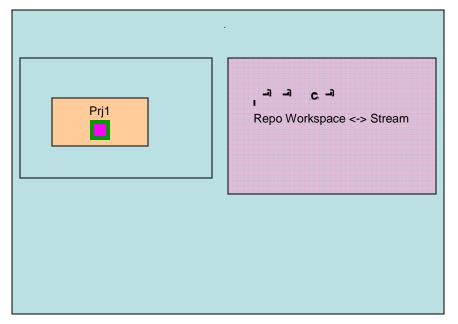

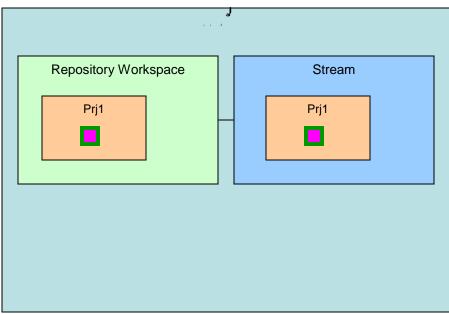


Create patch



• Link to work-items —

.C-1

• There are client & server pre-conditions

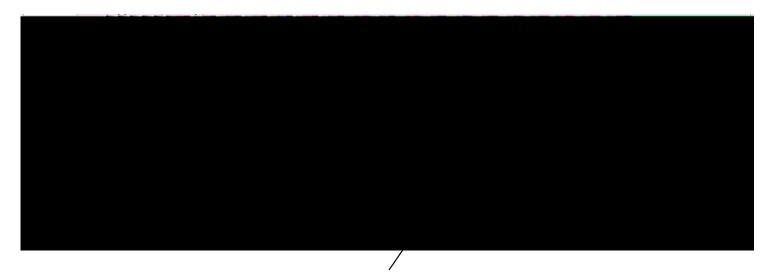

Depending on the process, you can overrule or not

.c .c, -1

